


## Dimension Drawing

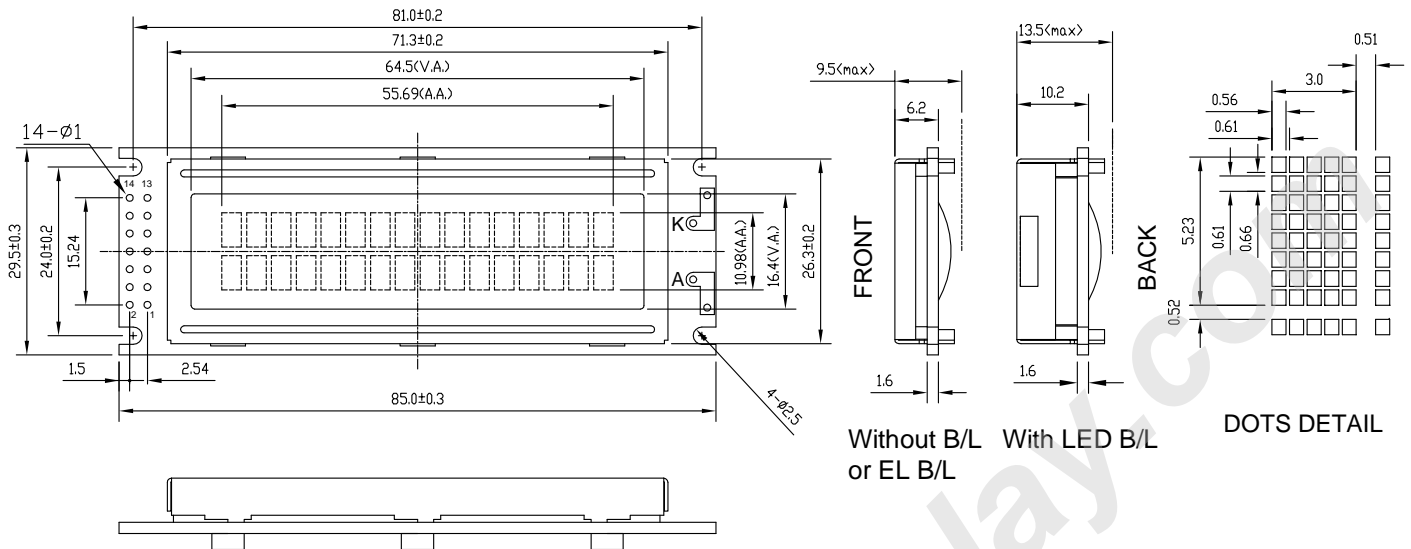

Without B/L With LED B/L  
or EL B/L

DOTS DETAIL

TOLERANCES UNLESS OTHERWISE STATED  
X.X ±0.20 X.XX ±0.10 UNIT: mm

## Feature:

1. 2-line x16 characters display; 5x8 dots with cursor
2. Built-in controller(ST7066U or equivalent)
3. +5V power supply(also available for +3.3V)
4. 1/16 Duty cycle
5. BTN, HTN, STN or FSTN Mode
6. Match all kind colors of LED back light
7. ROHS compliant

## Interface Pin Connections

PIN NO.	Symbol	Function
1	VSS	GND
2	VDD	+5V or +3.3V
3	V0	Contrast adjustment
4	RS	H/L Register select signal
5	R/W	H/L Read/Write signal
6	E	H/L Enable signal
7	DB0	H/L Data bus line
8	DB1	H/L Data bus line
9	DB2	H/L Data bus line
10	DB3	H/L Data bus line
11	DB4	H/L Data bus line
12	DB5	H/L Data bus line
13	DB6	H/L Data bus line
14	DB7	H/L Data bus line
15	A	Power supply for B/L(LED+)
16	K	Power supply for B/L(LED-)

## Mechanical Data

Item	Standard	Unit
Module dimension	85.0 x 29.5	mm
Viewing area	64.5 x 16.4	mm
Mounting hole	81.0 x 24.0	mm
Character size	3.00 x 5.23	mm

## Absolute Maximum Rating

Item	Symbol	Standard			Unit
		Min	Typ	Max	
Power supply	VDD-VSS	-0.3	---	7.0	V
Input voltage	VI	-0.3	---	VDD	

## Electronical Characteristics

Item	Symbol	Condition	Standard			Unit	
			Min	Typ	Max		
Input voltage	VDD	+5.0V	4.5	5.0	5.5	V	
		+3.3V	2.7	3.3	4.5	V	
Supply current	I <sub>DD</sub>	VDD=5V	----	0.2	0.5	mA	
Recommended LCD driving voltage for normal temp version module	VDD-V0 (VDD=5V)	-20 °C	4.9	5.2	5.5	V	
		0 °C	4.5	4.8	5.1		
		25 °C	4.1	4.5	4.8		
		50 °C	3.8	5.0	4.4		
LED forward voltage	VF	25 °C	----	4.2	4.6	V	
LED forward current	IF	25 °C	Array	----	120	----	mA
			Edge	----	15	20	
EL power supply	I <sub>EL</sub>	V <sub>EL</sub> =110V AC 400Hz	----	----	5.0	mA	

## Display Character Address Code:

Display position

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

DDRAM address 00 01 02 -- -- -- -- -- -- -- -- -- -- 0FH  
DDRAM address 40 41 42 -- -- -- -- -- -- -- -- -- -- 4FH